


QS Wire Landing Board

The wire landing board is a wiring aid consisting of a printed circuit board with one set of five terminal blocks. Each terminal block can accept up to two 18 AWG (1.0 mm²) wires and is connected pin-to-pin, to simplify wiring.

The wire landing board can be installed in a low-voltage enclosure or at the bottom of a feed-through panel.

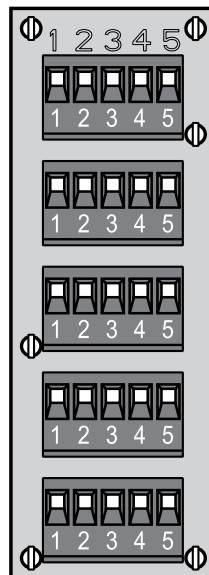

QS-WLB

Model Number

QS-WLB QS Wire Landing Board


QS Wire Landing Board

Specifications

Model Number	QS-WLB
Low-Voltage Connections	One set of five terminal blocks. Each terminal block has 5 terminals that will each accept up to two 18 AWG (1.0 mm ²) wires.
Environment	Ambient operating temperature: 32 to 104 °F (0 to 40 °C). Ambient operating humidity: 0-90% humidity, non-condensing. Indoor use only.
Mounting	Mounts in the following enclosures: L-LV14-120, L-LV14-230, L-LV21-230, HQ-LV21-120, and HWI-PNL-8
Warranty	www.lutron.com/TechnicalDocumentLibrary/Warranty.pdf www.lutron.com/TechnicalDocumentLibrary/Intl_Warranty.pdf


Dimensions

Dimensions shown as: in (mm)

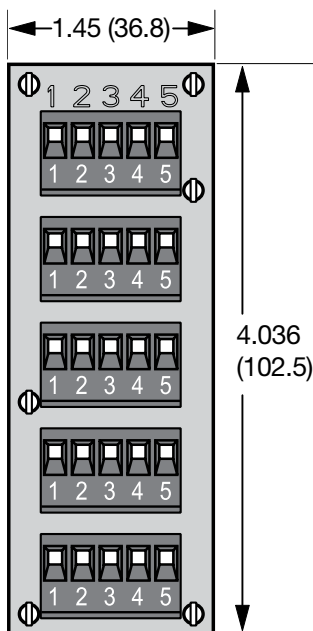

QS Wire Landing Board

Configuration Example

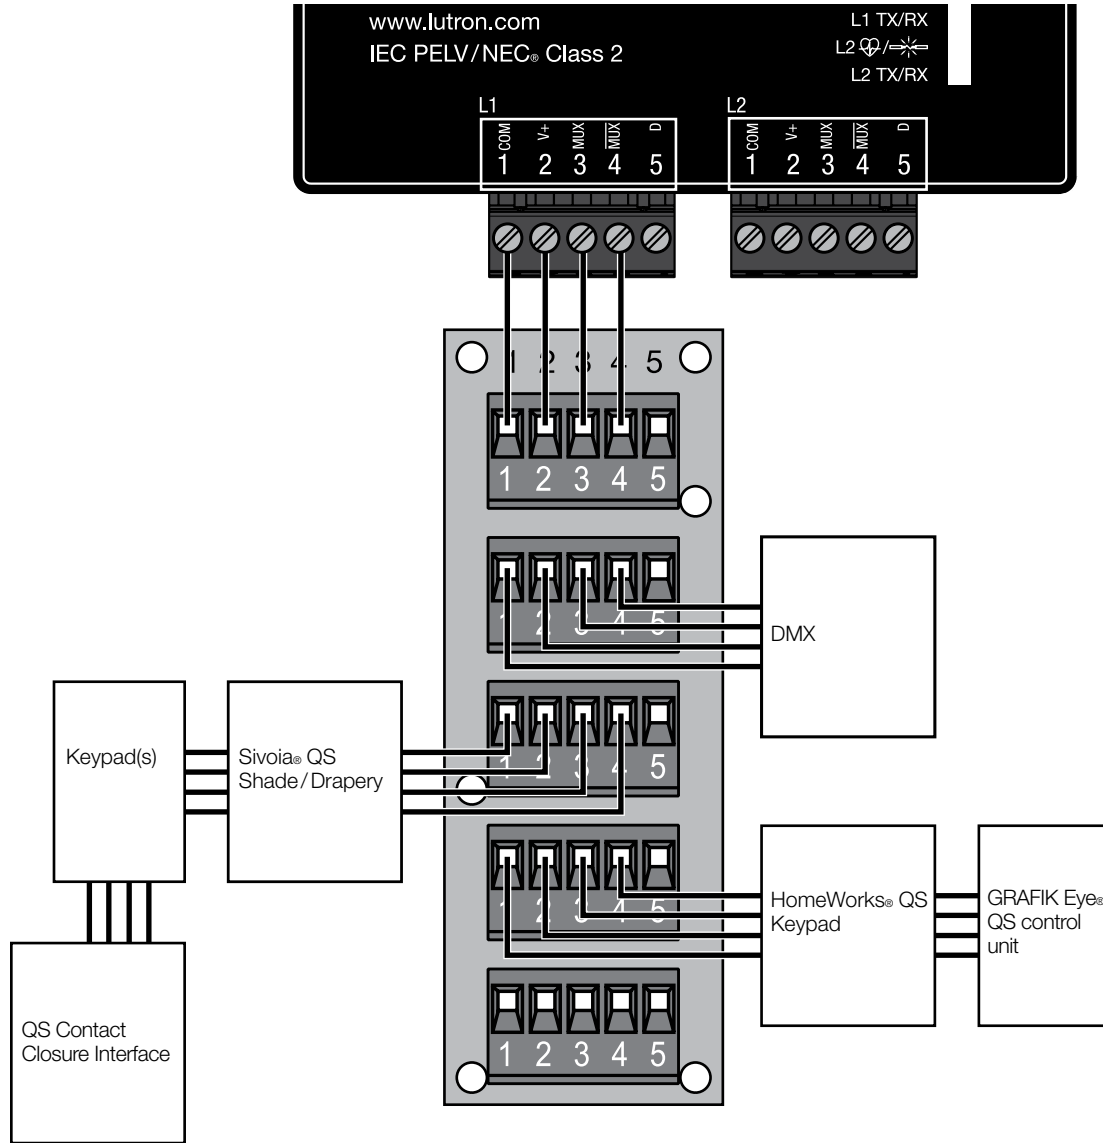

- Tighten terminal blocks to 3.5 to 5 in-lb (0.4 to 0.57 N•m). Do not overtighten.
- Terminal 5 is used to connect the QS cable shield drain wire throughout the system.