



DLA7255EP : 55mm backset
 DLA7260EP : 60mm backset
 DLA7265EP : 65mm backset

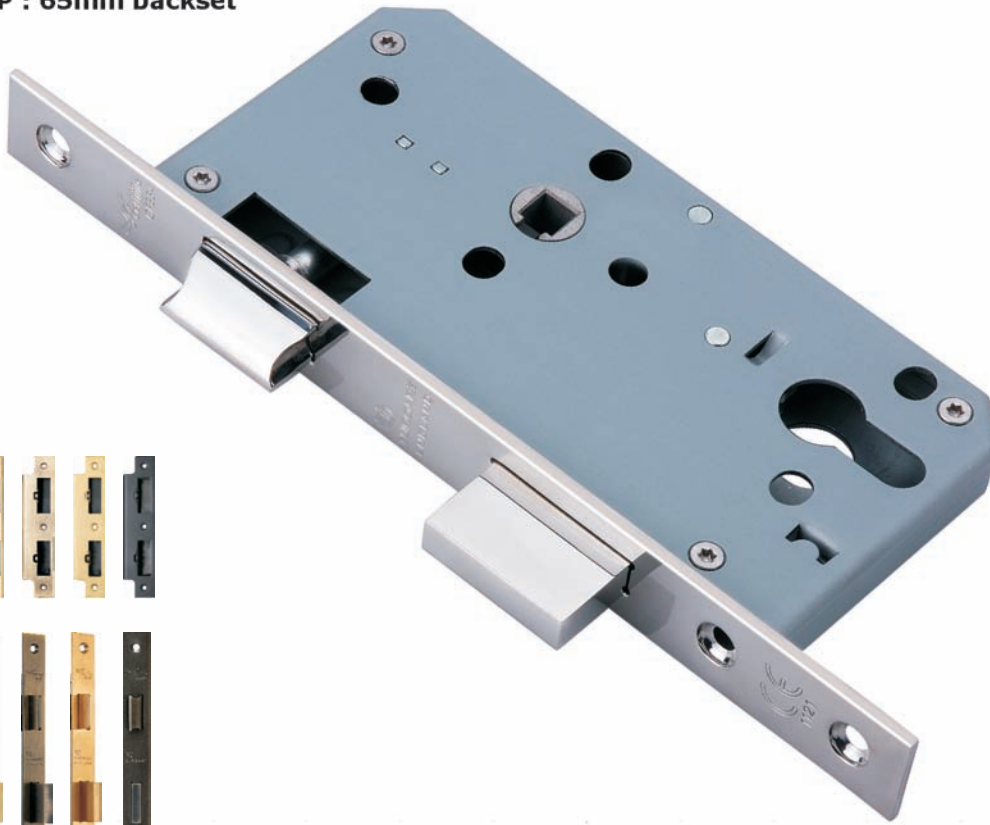

Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD

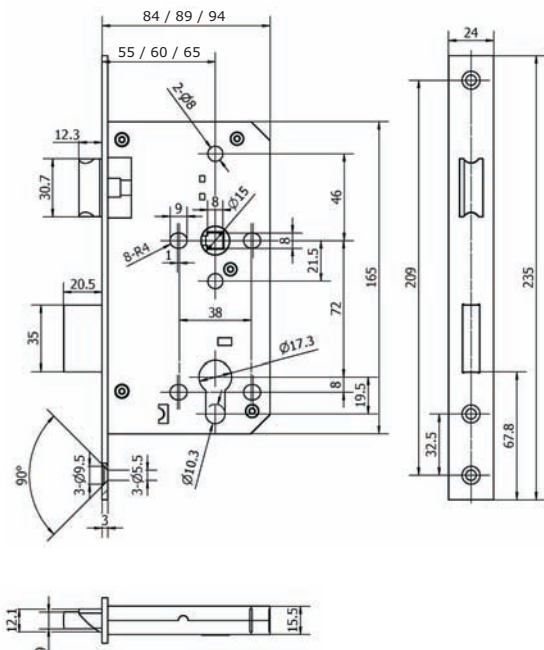

Features

- 55/60/65mm backset, 72mm centres
- SS 304 forend, strike plate and follower
- SS 304 latch bolt, SS 304 dead bolt
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Suitable for 120min timber and 240min metal doors
- Cylinder can withdraw both latch and deadbolt - offers convenience and safety combined with security
- For use by public where there is little incentive to exercise care and high chance of misuse

BS EN 12209 Classification

3	X	8	1	0	G	3	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---