

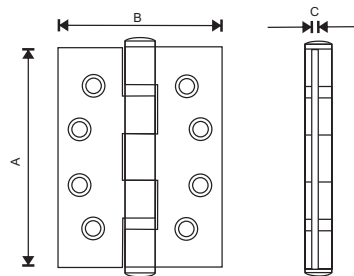

**Finishes:**


Other finishes are available on order

**Features**

- Suitable for 120min timber and 240min metal fire/smoke resistant doors
- Double ball bearing, five knuckle hinge
- Successfully tested for conformity to all the requirements of BS EN1935
- Load bearing capacity up to 120kg
- Available square or radius
- Tested to Grade 7: 200,000 cycles
- Pre-cut intumescent hinge pads available

Ref. No.	Size (A x B x C)
<b>HINBB433</b>	: 102 x 76 x 3mm
● HINBB43.53	: 102 x 89 x 3mm
● HINBB443	: 102x 102x 3mm
● HINBB533	: 127 x 76 x 3mm
● HINBB4.543.4	: 114x102x3.4mm
● HINBB4.54.53.4	: 114x114x3.4mm


**BS EN 1935 Classification**

4	7	6	1	1	4	0	13
---	---	---	---	---	---	---	----