



UNIBollard

BCP211 LED900/WW 13W 100-240V Rec silver

UNIBollard, 1000 lm, 13 W, 830 warm white, Safety class I, Baseplate

UNIBollard is dedicated to light up public environments of park, buildings outside area, compound areas to bring you a more bright light in evening with the safety and convenience. Its graceful appearance is also a part of public scenery to beautify area you live.

Warnings and Safety

- Use additional surge protection device in electrical circuit for lighting wiring.

Product data

General Information		Operating and Electrical	
Light source replaceable	No	Input Voltage	100 to 240 V
Driver included	Yes	Line Frequency	50 or 60 Hz
Light source engine type	LED	Power Consumption	13 W
Flammability mark	-	Power Factor (Fraction)	0.8
CE mark	-	Connection	Screw connection block 3-pole
		Cable	Cable 0.3 m with connector 3-pole
Light Technical		Temperature	
Luminous Flux	1,000 lm	Ambient temperature range	-40 to +50 °C
Standard tilt angle posttop	-		
Correlated Color Temperature (Nom)	3000 K	Controls and Dimming	
Luminous Efficacy (rated) (Nom)	65 lm/W	Dimmable	No
Color rendering index (CRI)	>80	Control interface	-
Light source color	830 warm white		
Optical cover type	Polycarbonate bowl/cover opal		

UNIBollard

Mechanical and Housing

Housing Material	Aluminum
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Housing Color	Aluminum and white
Mounting device	Baseplate
Optical cover finish	Opal
Overall length	130 mm
Overall width	130 mm
Overall height	600 mm
Dimensions (Height x Width x Depth)	600 x 130 x 130 mm

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK06 [1 J]
Protection class IEC	Safety class I


Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Power consumption tolerance	+/-10%

Product Data

Order product name	BCP211 LED1000/WW 13W 100-240V Rec AL
Full product name	BCP211 LED900/WW 13W 100-240V Rec silver
Full product code	911401755242
Order code	01755242
Material Nr. (12NC)	911401755242
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

Dimensional drawing

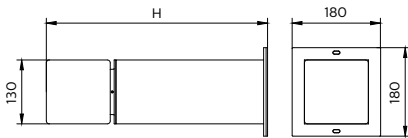

	H:mm
BCP210	450
BCP211	600
BCP212	1000

