


## Uponor MLC pipe white S 110x10,0 5m

1013457

- bar
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

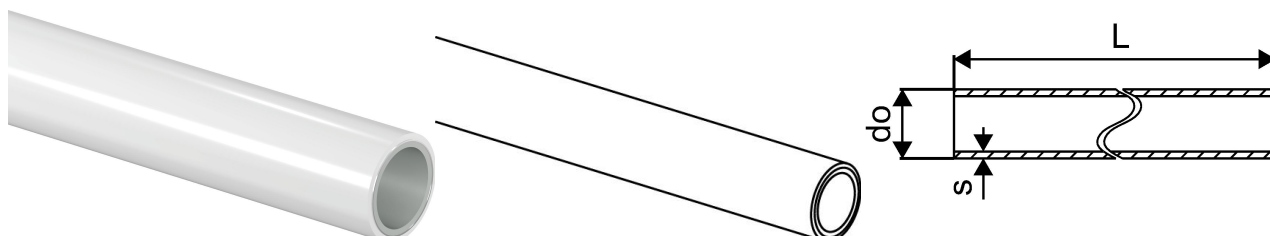

### Application information Uponor MLC pipe white S

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor MLC pipe white S 110x10,0 5m

1013457

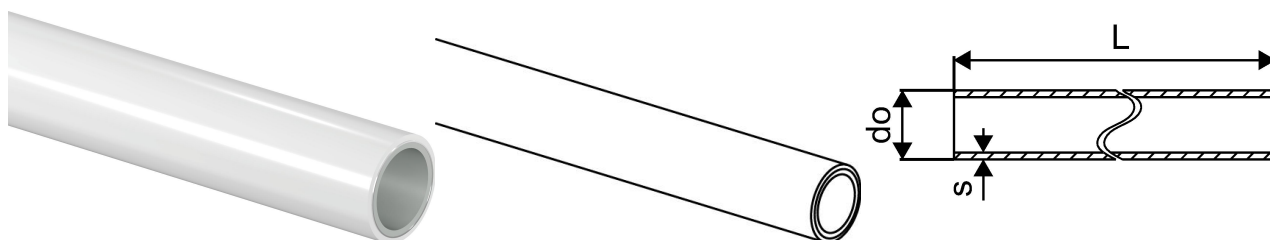

### Technical data

Item no VVS	087306191
Item no NRF	5071335
Item (unit of measurement)	Metre
Packaging Quantity PL2	5
Packaging Quantity PL4	165

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)