

BOSTON 20



SPECIFICATIONS

Version	BOSTON 20
Power (W)	20
mA	700
Driver	Not included
Color temperature	2K7-3K2-4K
Real lumens (lm)	1540-1730-1680
CRI	CRI >90
UGR	UGR<19
Beam angle	60°
Finishes	White
Measures (mm)	174x87
Cutout hole (mm)	145x100
Weight (Kg)	0.30
Body	Aluminium
Reflector	Aluminium
IP	IP64 FRONT
Temperature range	-20°C +40°C
Warranty	3-years



ACCESSORIES



Driver DALI EU 250-700mA 20W 100-240V
Ref. 4.3049.3102




Driver ON-OFF EU 700mA 3,5-30W 200-240V
Ref. 4.3063.1101



Driver ON-OFF 700mA 19-30W 100-240V
Ref. 4.1013.1105



BOSTON 20 Frame
Ref. 1.1146.8201

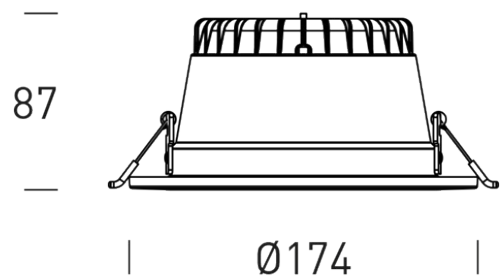



Driver DALI & PUSH
EU 300-1050mA 3-
38W 240V
Ref. 4.3069.6101

DETAILS



Adjustable
temperature switch



Aluminium body



Interchangeable rings