


## Uponor Uni Pipe PLUS white 16x2,0 100m

1059576

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

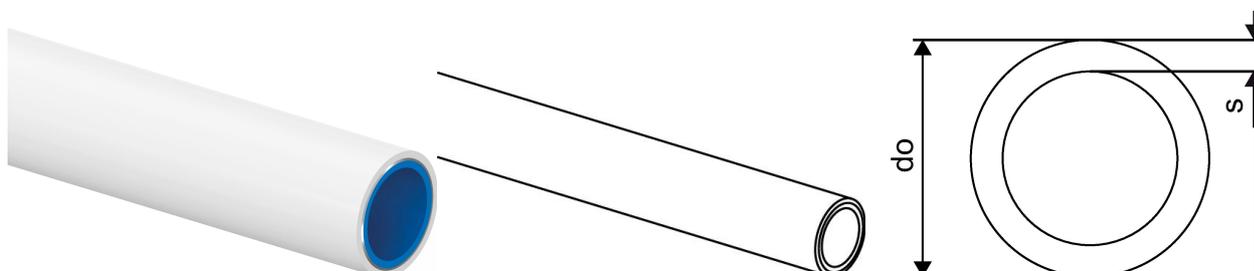

### Application information Uponor Uni Pipe PLUS white

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

#### Application



- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor Uni Pipe PLUS white 16x2,0 100m

1059576

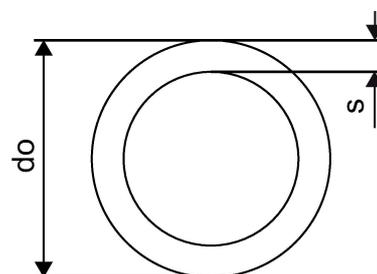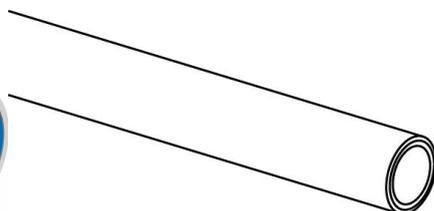

### Technical data

Item no VVS	087480516
Item no NRF	5072088
Item (unit of measurement)	Metre
Packaging Quantity PL1	100
Packaging Quantity PL4	2000

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com